


RELIABLE POWER ENDLESS POSSIBILITY



Million Power



Engineered For Indian Roads



Million Power

Lithium-ion

3-Wheeler Batteries

L3 Category

Capacity Range

105Ah to 150Ah

Voltage Range

51.2V-72V



HIGH CURRENT
SUSTAINABILITY



NON-CONTROLLED
CHARGING PROTECTION



ANTI THEFT
PROTECTION



THERMAL
PROTECTION



MULTILAYER
PROTECTION



ROBUST DESIGN &
WATER SPLASH PROOF



BLUETOOTH
CONNECTIVITY




Million Power


Application	L3M L3N	Application	L3M L3N
Battery Voltage (V)	51.2	Charge & Discharge separate port	Yes
Battery capacity (Ah)	105	Connector	Charging: Anderson Connector SBS75X Discharging: Anderson Connector SB50
Energy (KWh)	5.37		
Operating Voltage (UV)	44-58.4	Pack Over Voltage protection	Available
IP Rating	IP65	Pack Under Voltage protection	Available
Battery Enclosure	MS (GI)	Cell Over Voltage protection	Available
Operating Temp	0°C - 55°C	Cell Under Voltage protection	Available
Recommended working Temp Range	10°C - 45°C	Over Charge Current Protection	Available
Recommended Discharge Current (A)	30	Over Discharge Current Protection	Available
Peak Discharge Current (A)- 10 Sec	80	Temperature protection	Available
Weight (Kg)	47*kg	Short Circuit Protection	Available
Maximum Motor Power (KW)	1.2 KW	GPS	On Customer Demand
DOD Percentage	80%	Cell Balancing	Passive
Warranty	3 Years	Communication Protocol	CAN
Cell Configuration	16S 1P	Charger Rating	58.4V-21A-25A
Battery Dimension mm ±2	600 X 325 X 225	Bluetooth	Available
BMS Type	Smart	Application Standard	AIS156-A3 (Phase-II)



MPLFP51105EV
L3 Category



Million Power

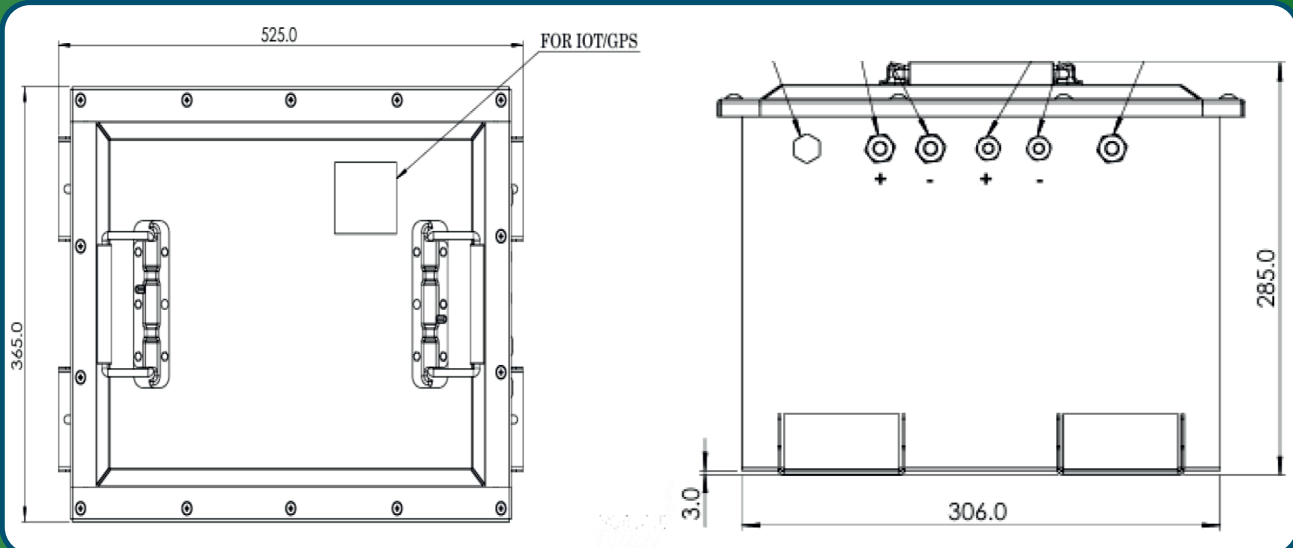

Million Power Private Limited



info@millionpower.in



9555872224 , 9354303401



www.millionpower.in



Corporate Office:

JC2M+99F NX ONE, Techzone-4, Greater Noida West,
Tech Zone IV, Amrapali Dream Valley, Greater Noida,
Uttar Pradesh 201318.